

New Wall Mounted Model

New design for home and commercial use released !




ASYG07/09/12/14KMCC
AOYG07/09/12/14KMCC




Point Slim & stylish square design

Slim and stylish square design is realised by high density multi-path heat exchanger and high efficiency fan.

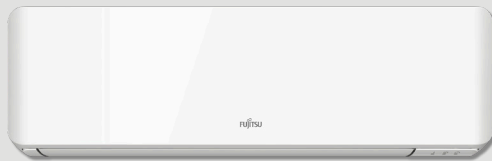

Point Comfortable airflow & Silent operation

The big louvre and the new air blowing structure have attained a comfortable air flow and silent operation.



20dB(A)

Point High energy saving

Top class high efficiency is achieved by high efficient lamda heat exchanger, large cross flow fan and new refrigerant.

*1
Rank
A++

SEER
7.3^{*2}


SCOP
4.4^{*2}

*1: All classes (cooling)

*2: 12model only

Point Smartphone Control (Option)

Easy air conditioner control from inside or outside the house and office using the Smartphones, Tablets, and PC. (Supplied loose for site installation).



Wireless LAN Interface
The exclusive Wi-Fi adaptor enables to operate the air conditioner by smartphone or tablet PC f

**Model: ASYG07KMCC / ASYG09KMCC / ASYG12KMCC / ASYG14KMCC
AOYG07KMCC / AOYG09KMCC / AOYG12KMCC / AOYG14KMCC**



Wireless RC



ASYG07/09/12/14KMCC



AOYG07/09/12KMCC



AOYG14KMCC

Optional parts


Wired remote controller : UTY-RVNYM
Simple remote controller : UTY-RSNNY

Communication kit : UTY-TWBXF2
Wireless LAN Interface : UTY-TFSXW1


External connect kit : UTY-XWZX25

Dimensions


**Indoor unit : ASYG07KMCC / ASYG09KMCC /
ASYG12KMCC / ASYG14KMCC**

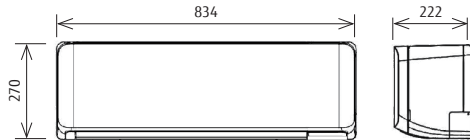

**Outdoor unit : AOYG07KMCC / AOYG09KMCC /
AOYG12KMCC**

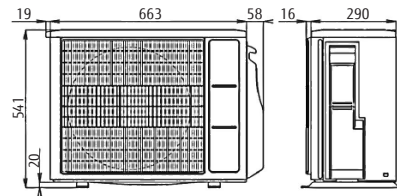

AOYG14KMCC

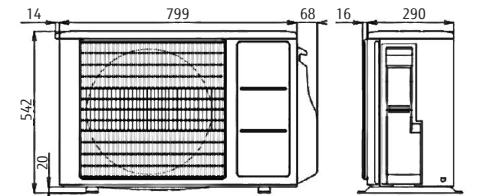

(Unit : mm)

Specifications


TENTATIVE

Model name	Indoor			Ø/Hz/V	ASYG07KMCC	ASYG09KMCC	ASYG12KMCC	ASYG14KMCC
	Outdoor				AOYG07KMCC	AOYG09KMCC	AOYG12KMCC	AOYG14KMCC
Power supply	Phase / Hz / Voltage				1 / 50 / 230			
Cooling	Capacity	Rated		kW	2.00	2.50	3.40	4.20
		Min ~ Max		kW	0.9 - 3.0	0.9 - 3.2	0.9 - 3.9	0.9 - 4.4
	Input Power			kW	0.450	0.630	0.935	1.220
	EER			WW	4.43	3.97	3.65	3.44
	Pdesign c			kW	2.00	2.50	3.40	4.20
	SEER			-	7.20	7.40	7.30	6.90
	Energy rank			-	A++	A++	A++	A++
	Max.Operating Current			A	6.5	6.5	6.5	6.5
	AirFlow Rate			m³/h	650	700	700	770
	Noise	Indoor	Sound pressure	Hi / Mi / Lo / Qu	dB(A)	38 / 33 / 29 / 20	40 / 34 / 29 / 20	40 / 35 / 30 / 20
Power level			Hi	54		55	55	57
Outdoor		Sound pressure	Hi	46		46	50	50
		Power level	Hi	61		61	65	65
Heating	Capacity	Rated		kW	2.50	2.80	4.00	5.40
		Min ~ Max		kW	0.9 - 3.4	0.9 - 4.0	0.9 - 5.3	0.9 - 6.0
	Input Power			kW	0.555	0.620	0.960	1.410
	COP			WW	4.52	4.52	4.17	3.83
	Pdesign h			kW	2.30	2.40	2.50	4.00
	SCOP			-	4.10	4.10	4.40	4.10
	Energy rank			-	A+	A+	A+	A+
	Max.Operating Current			A	9.0	9.0	9.0	9.0
	AirFlow Rate			m³/h	720	750	770	800
	Noise	Indoor	Sound pressure	Hi / Mi / Lo / Qu	dB(A)	41 / 35 / 31 / 22	42 / 36 / 31 / 22	42 / 38 / 33 / 22
Power level			Hi	56		57	58	59
Outdoor		Sound pressure	Hi	46		46	50	50
		Power level	Hi	61		62	65	66
Dimension	Indoor	H×W×D		mm	270×834×222	270×834×222	270×834×222	270×834×222
		Weight		kg	10	10	10	10
	Outdoor	H×W×D		mm	541×663×290	541×663×290	541×663×290	540×799×290
		Weight		kg	23	23	25	31
Piping	Connection Pipe Diameter (Liquid / Gas)			mm	φ 6.35 / φ 9.52	φ 6.35 / φ 9.52	φ 6.35 / φ 9.52	φ 6.35 / φ 9.52
	Drain hose Diameter (I.D./O.D.)			mm	φ 13.8 / φ 15.8 - 16.7	φ 13.8 / φ 15.8 - 16.7	φ 13.8 / φ 15.8 - 16.7	φ 13.8 / φ 15.8 - 16.7
	Max pipe length			m	20	20	20	20
	Pre charge pipe length			m	15	15	15	15
Operation range	Cooling			°C	-10 to 46	-10 to 46	-10 to 46	-10 to 46
	Heating			°C	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant	Amount of Refrigerant (type)			g	600 (R32)	600 (R32)	700 (R32)	850 (R32)

Note : Specifications are based on the following conditions.

Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.

Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.



ISO 9001 Certified number: 01 100 075229
ISO 14001 Certified number: 01 104 9245
Fujitsu General (Thailand) Co., Ltd.

- Specifications and design are subject to change without notice for further improvement.
- Actual products' colours may be different from the colours shown in this printed material.

Distributed by :

FUJITSU GENERAL AIR CONDITIONING (UK) LTD
Unit 150 Centennial Park, Centennial Avenue, Elstree, Herts. WD6 3SG
www.fujitsu-general.com/uk

Tel: +44 (0)208 731 3450 Fax: +44 (0)208 731 3451